

trend® Blinds & Curtains



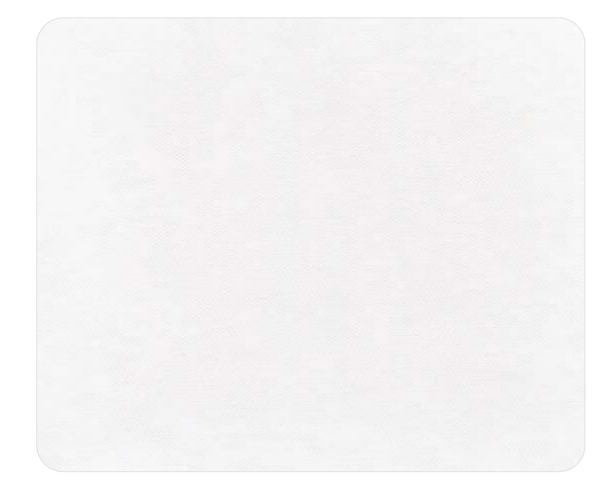

Roman Shades



Vertical Blinds



Motorized Roller Blinds




Velums

Roof Blinds

Japanese Curtains

İnstallation




Roller Blinds



Measuring



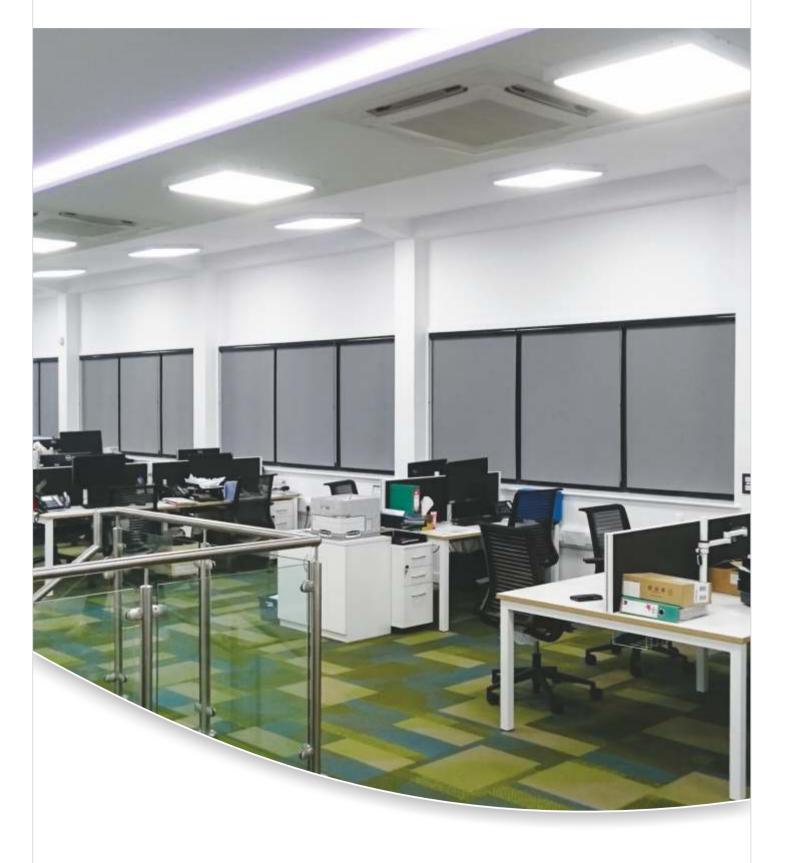

BLOCKER FR

Blocker FR

Composition	100% PES
Weave Pattern	Basket
Width	300 cm
Weight	350 g/m ²
Thickness	0.42 mm
Roll length	30 m
Flame Retardancy (FR)	NFPA 701
Moisture Resistant	Yes
Transparency Level	Opaque
Backside application	PVC coating
Antibacterial	Optional
Openness Factor	0%
LEED Support	No
Accoustic Coefficient (a)	0.24, BS EN ISO 11654
Color Fastness	6, ISO105 B 02
Rubbing Fastness	>4, EN ISO 105 - X12

Technical information specified in this catalog should be evaluated in accordance with the General Terms & Conditions of Sale of Trend Blinds & Curtains Istanbul or the technical sections of the contact of the related project and hence is not legally binding.













Main Office (KEYAP) Keyap Caddesi J1 Blok N: 142 Yukarı Dudullu/Ümraniye/İstanbul /TR Tel: +90 216 **327 0727** **Showroom**Barbaros Bulvarı No:75/A Beşiktaş/İstanbul/TR
Tel: +90 212 **327 0727**e-mail: info@trendperde.com.tr



www.**trendperde**.com.tr —

Thermal and optical factors in the European standard EN 14501

COLOR	CODE	RS	AS	TS	TV	TUV
	BF10	71	29	0	0	0
	BF15	71	29	0	0	0
	BF20	71	29	0	0	0

TS: Solar Transmittance

% of solar energy transmitted through the fabric. A low percentage means the fabric performs well at reducing solar energy.

RS: Solar Reflectance

% of solar radiation reflected by the fabric. A high percentage means the fabric performs well at reflecting solar energy.

AS: Solar Absorptance

% of solar radiation absorbed by the fabric.

A lowpercentagemeans the fabric absorbs little solar energy.

Solar radiation is always partially transmitted through, absorbed or reflected by the fabric.

The sum of all 3 equals 100.

Ts + Rs + As = 100% of solar energy.

Tv Visible light transmittance


total percentage of light radiated through the fabric over a wavelength of 380 to 780nm (nanometers), called the visible spectrum (total illumination)

In a nutshell


Blocks the light transmitance entirely	100% blackout
Made of certified unharmful materials	Healthy
Elite tear resistance	Robust
Tried and tested solution worldwide over decades	Value
Minimalist design	Modern



Blocker FR

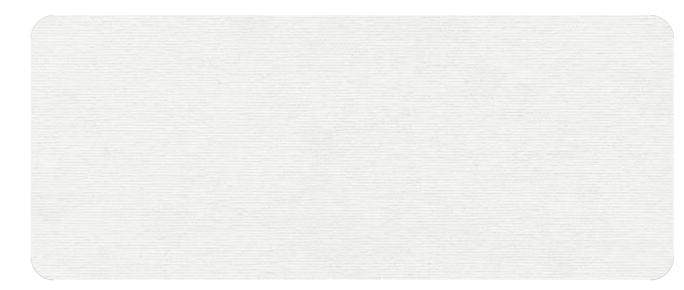

BF10

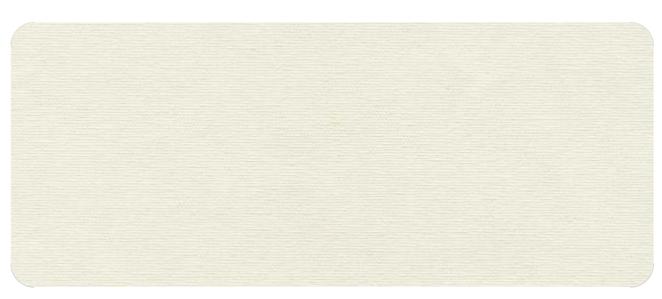

BF15

